



## **MTBT API Specification**

**Version: 6.4**

**Date: 09 May 2026**

NSE DATA & ANALYTICS LIMITED  
EXCHANGE PLAZA,  
PLOT NO. C/1, G BLOCK,  
BANDRA-KURLA COMPLEX,  
BANDRA (E), MUMBAI 400 051.  
INDIA.

© 2009 National Stock Exchange India Limited. All rights reserved.

**COPYRIGHT NOTICE**

All rights reserved. No part of this document may be reproduced or transmitted in any form and by any means without the prior permission of NSE Data & Analytics Ltd.

## Revision History

| Name        | Description                                                                                             | Date             |
|-------------|---------------------------------------------------------------------------------------------------------|------------------|
| Version 6.1 | Details about Load Balancer.<br>FAQ on handling crossed orders scenario                                 | 30 January 2019  |
| Version 6.2 | FAO MTBT feed discontinued                                                                              | 1 September 2021 |
| Version 6.3 | Addition of new structure for Trade Cancellation<br>(Applicable only for CM Segment)                    | 13 February 2024 |
| Version 6.4 | Updated statement for Trade Message in section 6.2 and Updated point 9 and added point 10 in section 10 | 09 May 2026      |


## Table of Contents

|                                                                |    |
|----------------------------------------------------------------|----|
| 1. Introduction .....                                          | 5  |
| 2. Session Details .....                                       | 7  |
| 3. Data Types Used.....                                        | 8  |
| 4. Packet Format .....                                         | 9  |
| 5. Masters Data Details .....                                  | 10 |
| 5.1 Contract Information File Details .....                    | 10 |
| 5.2 Spread Contract Information File Detail (CD segment) ..... | 12 |
| 6. Sequenced Data Messages (Market Data) .....                 | 14 |
| 6.1 Order Message.....                                         | 14 |
| <b>6.2 Trade Message</b> .....                                 | 16 |
| 6.3 Spread Order Message (CD segment) .....                    | 17 |
| 6.4 Spread Trade Message (CD segment) .....                    | 18 |
| 7. Recovery Details.....                                       | 20 |
| 7.1. Tick Data Recovery Request Message .....                  | 20 |
| 7.2. Tick Data Recovery Response Message .....                 | 21 |
| 8. Recovery Guideline .....                                    | 22 |
| 9. Heartbeat Message.....                                      | 23 |
| <b>10. FAQs</b> .....                                          | 24 |
| 11. Tuning guidelines .....                                    | 26 |
| 11.1 NIC Recommendations .....                                 | 26 |
| 11.2 Increase the Kernel Receiver Backlog.....                 | 26 |
| 11.3 Increase the NIC Ring Buffer Receive size on NICs: .....  | 26 |
| 11.4 Increase the OS Send and Receive Buffers.....             | 28 |
| 11.5 Increase the Application Send and Receive Buffers .....   | 29 |
| 11.6 Ensure that Multicast IP is also provided to “bind” ..... | 29 |
| 11.7 Disclaimer .....                                          | 30 |
| 12. Abbreviations and Acronyms Used.....                       | 31 |
| 13. Support Information .....                                  | 32 |

## NSE – MTBT Feed

### 1. Introduction

The NSE MTBT Feed is the Tick By Tick data feed of NSE. It disseminates information about orders and trades on a real time basis. The feed consists of series of sequenced variable length messages. NSE MTBT Feed data is sent to clients on a connection-less UDP Multicast.

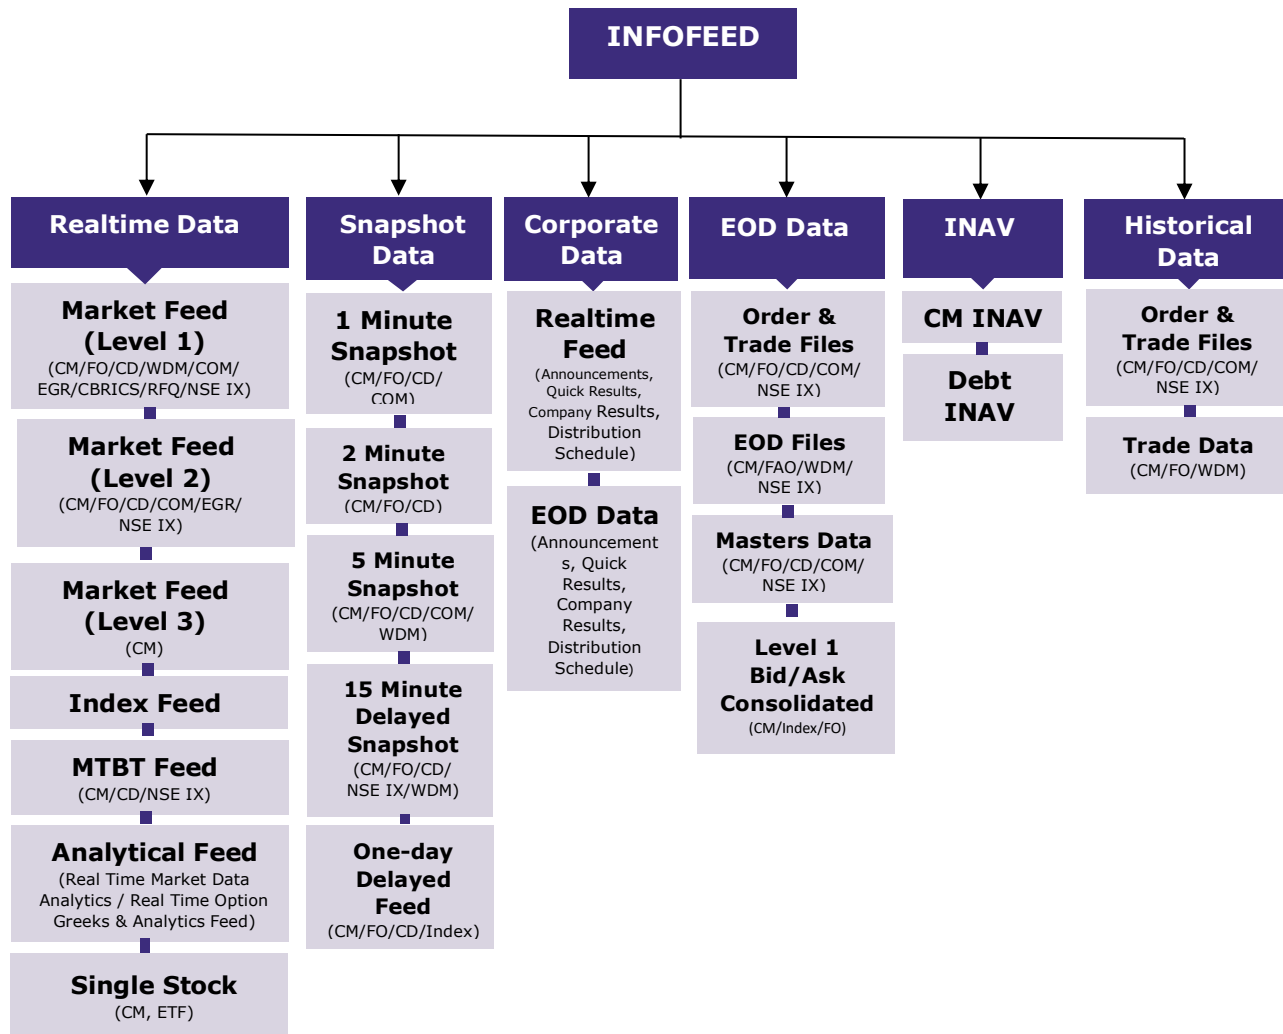

NSE Data & Analytics Ltd. (NDAL) provides a comprehensive suite of real-time and historical market data products sourced from NSEIL, supporting a wide range of analytical, regulatory, and archival use cases across the Capital Market (CM), Futures & Options (FO), Currency Derivatives (CD), Commodity Derivatives (COM), and NSE IX segments. These products deliver both high-frequency intraday information and structured end-of-day datasets to meet diverse client requirements.

This document specifies the Real-Time Tick-by-Tick (MTBT) Market Data Feed for Capital Market (CM) and Currency Derivatives (CD) segments provided by NSE Data & Analytics Limited (NDAL). It describes the feed structure, message formats, and field definitions required to consume low-latency, exchange-generated tick-by-tick market data.

## 2. Session Details

The Tick Data feed is available as separate Multicast Channels for separate Streams. The contracts are distributed across the streams. For e.g., Contracts 1-4 will be on stream 1, contracts 5-8 on stream 2 and so on.

A Data packet consists of a Header which has Stream ID and Sequence number fields. The sequence Number for the first message of the day for the stream will be sent as 1. After that, it will be increased by 1 for each consecutive message for the Stream.

In case of switchover to DR site during the day, the sequence no. for the first message for each stream from DR site will be sent as 1. After that, it will be incremented by 1 for each consecutive message for the Stream.

Master information is available in file format at end of day and can be downloaded at any time.

Masters Information provides contract descriptor information about all the contracts available through different Streams and provides the mapping of a contract for a particular Stream.

### 3. Data Types Used

| Data Type | Size in Bytes | Signed/ Unsigned          |
|-----------|---------------|---------------------------|
| CHAR      | 1             | Signed                    |
| SHORT     | 2             | Signed                    |
| LONG      | 4             | Signed                    |
| DOUBLE    | 8             | Signed and Floating Point |
| BIT       | 1 bit         | NA                        |

Byte order – Little Endian.

Pragma Pack – 1

## 4. Packet Format

Server sends all the packets in following format:

Stream Header:

```
typedef struct
{
    short msg_len;
    short stream_id;
    int    seq_no;
}STREAM_HEADER;
```

Stream Data:

```
typedef struct
{
    char cMsgType;
    .
    .
    .
}STREAM_DATA;
```

Each Data Packet consists of a Header and Data.

The Header (STREAM\_HEADER) consists of following fields:

1. Message Length: This is the total size of the packet including Header and Data i.e. Sum of length of STREAM\_HEADER and STREAM\_DATA.
2. Stream Id: This identifies a particular stream
3. Sequence No: This is the sequence number of the packet for a particular Stream Id.

Each Data Packet, i.e. STREAM\_DATA has Message Type as the first field. Always, the first field should be read first and interpreted. Depending on the value of this field the Data Packet should be mapped to relevant message structure.

## 5. Masters Data Details

To be able to interpret the data feed, the Client requires Masters Data.

The data contains contract information such as Token, Symbol, Instrument, Expiry Date, Strike Price and Option Type. This data also provides the mapping of Contract Information to Stream ID i.e. the Stream in which the contract is available.

All the Order and Trade Messages have only the Token Field for representing the contract. The Client Application must load the Masters Data for the day before receiving Orders and Trades. Otherwise, the Client Application will be working on wrong information.

### 5.1 Contract Information File Details

This is a plain-text CSV file containing information for normal contracts for the trading day.

| Nomenclature                               | File Format     | Field delimiter |
|--------------------------------------------|-----------------|-----------------|
| CD Segment:<br>cd_contract_stream_info.csv | Plain Text, CSV | Comma (,)       |
| CM Segment:<br>cm_contract_stream_info.csv | Plain Text, CSV | Comma (,)       |

#### Header Record:

This is the first line in the file. It contains the file generation timestamp along with number of contracts in the file, each followed by a comma.

| Field Name       | Data Type | Value   | Brief Description                                         |
|------------------|-----------|---------|-----------------------------------------------------------|
| Date             | INT       | Numeric | File generation time in seconds from 01-Jan-1980 00:00:00 |
| No. of contracts | INT       | Numeric | Number of contract records                                |

## Contract Information Records:

The fields of the subsequent lines should be interpreted as follows. Each field is followed by a comma.

| Field Name   | Data Type | Value        | Brief Description                                                                                                                                                                                 |
|--------------|-----------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Message Type | CHAR      | 'C'          | Contract Information                                                                                                                                                                              |
| Stream ID    | SHORT     | Numeric      | Availability of this contract on a particular Stream                                                                                                                                              |
| Token Number | INT       | Numeric      | Unique identifier for contract                                                                                                                                                                    |
| Instrument   | CHAR [6]  | Alphanumeric | CD: Security Instrument. E.g. FUTIDX<br>CM: Set to "EQUITY".<br>E.g. FUTENR, FUTBLN                                                                                                               |
| Symbol       | CHAR [10] | Alphanumeric | Security Symbol                                                                                                                                                                                   |
| Expiry Date  | INT       | Numeric      | CD: Expiry date of contract in seconds from 01-Jan-1980 00:00:00<br>CM: Not used, set to 0.                                                                                                       |
| Strike Price | INT       | Numeric      | Strike Price of contract (In Paise).<br>For CD segment this should be divided by $10^7$ for converting into Rupees.<br>This will be zero in case of a future contract.<br>CM: Not used, set to 0. |
| Option Type  | CHAR [2]  | Alphanumeric | CD: Option Type for the contract<br>CM: Series of security.                                                                                                                                       |

## 5.2 Spread Contract Information File Detail (CD segment)

This is a plain-text CSV file containing information for spread contracts for the trading day.

| Nomenclature                                   | File Format     | Field delimiter |
|------------------------------------------------|-----------------|-----------------|
| CD Segment:<br>cd_spd_contract_stream_info.csv | Plain Text, CSV | Comma (,)       |

### Header Record:

This is the first line in the file. It contains the file generation timestamp along with number of contracts in the file, each followed by a comma.

| Field Name              | Data Type | Value   | Brief Description                                         |
|-------------------------|-----------|---------|-----------------------------------------------------------|
| Date                    | INT       | Numeric | File generation time in seconds from 01-Jan-1980 00:00:00 |
| No. of spread contracts | INT       | Numeric | Number of spread contract records                         |

### Spread Contract Information Records:

The fields of the subsequent lines should be interpreted as follows. Each field is followed by a comma.

| Field Name   | Data Type | Value   | Brief Description                                           |
|--------------|-----------|---------|-------------------------------------------------------------|
| Message Type | CHAR      | 'P'     | Spread Contract information                                 |
| Stream ID    | SHORT     | Numeric | Availability of this spread contract on a particular Stream |
| Token 1      | INT       | Numeric | Token No. of First Spread Contract                          |
| Token 2      | INT       | Numeric | Token No. of Second Spread Contract                         |

## 6. Sequenced Data Messages (Market Data)

Sequenced data messages will be sent by server on UDP Multicast and will contain market data. These messages will contain normal market, regular lot and spread data.

### 6.1 Order Message

For every new order request, modification request, cancellation request, this message is sent. All new order requests will be sent, including the active orders. Modifications and cancellations must be handled at the client's end based on Order Id and not on Price.

Currently Stop Loss Orders are not sent to clients. However, when Stop Loss Order gets modified to Regular Lot Order or Regular Lot Order gets modified to Stop Loss Order it leads to the following scenarios:

It is possible that for an Order Cancellation Message the original Order Id is not found by the Client Application. In that case the particular Order Cancel message should be ignored by the Client application

It is possible that for an Order Modification Message the original Order Id is not found by the Client Application. In that case the particular Order Modification Message should be treated as a New Order and handled accordingly.

| Field Name    | Data Type     | Value             | Brief Description                                                       |
|---------------|---------------|-------------------|-------------------------------------------------------------------------|
| Global Header | STREAM_HEADER | Header Data       | Refer "Global Header" definition in <a href="#">Section 4</a> .         |
| Message Type  | CHAR          | 'N' or 'X' or 'M' | 'N' - New Order<br>'M' - Order Modification<br>'X' - Order Cancellation |
| Timestamp     | LONG          | Numeric           | Time in nanoseconds from 01-Jan-1980 00:00:00                           |
| Order ID      | DOUBLE        | Numeric           | Day Unique Order Reference Number                                       |
| Token         | INT           | Numeric           | Unique Contract Identifier                                              |
| Order Type    | CHAR          | Character         | 'B' - Buy Order<br>'S' - Sell Order                                     |

|          |     |         |                                                                                                                                                                                                                                                                                                                                 |
|----------|-----|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Price    | INT | Numeric | <p>Price of the order (In Paise)</p> <p>This field contains the price at which the order is placed. The price is multiples of the tick size.</p> <p>For CM segments this should be divided by 100 for converting into Rupees.</p> <p>For CD segment this should be divided by <math>10^7</math> for converting into Rupees.</p> |
| Quantity | INT | Numeric | Quantity of the order                                                                                                                                                                                                                                                                                                           |

## 6.2 Trade Message

This message is sent whenever an order in the order book gets executed fully or partially.

It is possible that either Buy Order ID or Sell Order ID can have value as Zero. In such a case that Order ID should be ignored and there should not be any follow up action based on that Order ID. Both the Order IDs will not have value zero at the same time **except Trades generated during Matching Phase of regular pre-open session, closing auction session, special pre-open session (SPOS) and Periodic call auction session.**

| Field Name     | Data Type     | Value       | Brief Description                                                                                                                                                                                                                                                                     |
|----------------|---------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Global Header  | STREAM_HEADER | Header Data | Refer "Global Header" definition in <a href="#">Section 4.</a>                                                                                                                                                                                                                        |
| Message Type   | CHAR          | 'T'         | 'T' = Trade Message                                                                                                                                                                                                                                                                   |
| Timestamp      | LONG          | Numeric     | Time in nanoseconds from 01-Jan-1980 00:00:00                                                                                                                                                                                                                                         |
| Buy Order ID   | DOUBLE        | Numeric     | Day Unique Order Reference Number for Buy-Side Order                                                                                                                                                                                                                                  |
| Sell Order ID  | DOUBLE        | Numeric     | Day Unique Order Reference Number for Sell-Side Order                                                                                                                                                                                                                                 |
| Token          | INT           | Numeric     | Unique Contract Identifier                                                                                                                                                                                                                                                            |
| Trade Price    | INT           | Numeric     | Trade Price (In Paise) This field contains the price at which the trade took place. The price is multiples of the tick size. For CM segments this should be divided by 100 for converting into Rupees.<br>For CD segment this should be divided by $10^7$ for converting into Rupees. |
| Trade Quantity | INT           | Numeric     | Trade Quantity                                                                                                                                                                                                                                                                        |

### 6.3 Spread Order Message (CD segment)

For every new spread order request, modification request, cancellation request, this message is sent. All new spread order requests will be sent including the active orders.

| Field Name    | Data Type     | Value             | Brief Description                                                                                                                                                                                                  |
|---------------|---------------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Global Header | STREAM_HEADER | Header Data       | Refer "Global Header" definition in <a href="#">Section 4.</a>                                                                                                                                                     |
| Message Type  | CHAR          | 'G' or 'H' or 'J' | 'G' - New Spread Order<br>'H' - Spread Order Modification<br>'J' - Spread Order Cancellation                                                                                                                       |
| Timestamp     | LONG          | Numeric           | Time in nanoseconds from 01-Jan-1980 00:00:00                                                                                                                                                                      |
| Order ID      | DOUBLE        | Numeric           | Day Unique Order Reference Number                                                                                                                                                                                  |
| Token         | INT           | Numeric           | Unique Contract Identifier                                                                                                                                                                                         |
| Order Type    | CHAR          | Character         | 'B' - Buy Order<br>'S' - Sell Order                                                                                                                                                                                |
| Price         | INT           | Numeric           | Price of the order (In Paise)<br>This field contains the price difference for this spread. The price is multiples of the tick size.<br>For CD segment this should be divided by $10^7$ for converting into Rupees. |
| Quantity      | INT           | Numeric           | Quantity of the spread order                                                                                                                                                                                       |

## 6.4 Spread Trade Message (CD segment)

This message is sent whenever a spread order in the order book gets executed fully or partially. It is possible that Buy Order ID or Sell Order ID can have value as Zero. In such a case that Order ID should be ignored and there should not be any follow up action based on that Order ID.

| Field Name    | Data Type     | Value       | Brief Description                                                                                                                                                                                        |
|---------------|---------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Global Header | STREAM_HEADER | Header Data | Refer "Global Header" definition in <a href="#">Section 4</a>                                                                                                                                            |
| Message Type  | CHAR          | 'K'         | 'K' = Spread Trade Message                                                                                                                                                                               |
| Timestamp     | LONG          | Numeric     | Time in nanoseconds from 01-Jan-1980 00:00:00                                                                                                                                                            |
| Buy Order ID  | DOUBLE        | Numeric     | Day Unique Order Reference Number for Buy-Side Order                                                                                                                                                     |
| Sell Order ID | DOUBLE        | Numeric     | Day Unique Order Reference Number for Sell-Side Order                                                                                                                                                    |
| Token         | INT           | Numeric     | Unique Contract Identifier                                                                                                                                                                               |
| Trade Price   | INT           | Numeric     | Trade Price (In Paise) This field contains the price at which the trade took place. The price is multiples of the tick size. For CD segment this should be divided by $10^7$ for converting into Rupees. |
| Quantity      | INT           | Numeric     | Quantity of the spread trade                                                                                                                                                                             |

## Trade Cancel Message (CM Segment)

This message is sent whenever a Trade gets cancelled. Both the Order IDs will have value as zero in this message.

| Field Name     | Data Type     | Value       | Brief Description                                                                                                                                                                         |
|----------------|---------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Global Header  | STREAM_HEADER | Header Data | Refer "Global Header" definition in <a href="#">Section 4.</a>                                                                                                                            |
| Message Type   | CHAR          | 'C'         | 'C' = Trade Cancel Message                                                                                                                                                                |
| Timestamp      | LONG          | Numeric     | Time in nanoseconds from 01-Jan-1980 00:00:00                                                                                                                                             |
| Buy Order ID   | DOUBLE        | Numeric     | This will be zero for trade cancel message.                                                                                                                                               |
| Sell Order ID  | DOUBLE        | Numeric     | This will be zero for trade cancel message.                                                                                                                                               |
| Token          | INT           | Numeric     | Unique Contract Identifier                                                                                                                                                                |
| Trade Price    | INT           | Numeric     | Trade Price (In Paise)<br>This field contains the price at which the trade took place. The price is multiples of the tick size. This should be divided by 100 for converting into Rupees. |
| Trade Quantity | INT           | Numeric     | Trade Quantity                                                                                                                                                                            |

## 7. Recovery Details

Recovery Server provides recovery of missed Tick Data for a particular multicast stream.

If the end client application misses any tick data, it can recover the ticks by requesting the Recovery Server for the missed tick. This request is on TCP. The Recovery Server will provide the missed tick data on TCP.

### 7.1. Tick Data Recovery Request Message

Whenever tick data is missed this message needs to be sent to Recovery Server on TCP. No header is required for this message. In case only one tick is missed Start Sequence No. and End Sequence No. should be same.

A Tick Data Recovery Response Message is sent first by the Recovery Server to indicate whether this request will be processed successfully by Recovery Server.

If the Tick Recovery is successful, then rest of the response messages are provided on TCP and format is same as mentioned in [section 4](#).

If the Tick Recovery Request is unsuccessful, Member Application can send the request again.

| Field Name            | Data Type | Value   | Brief Description                 |
|-----------------------|-----------|---------|-----------------------------------|
| Message Type          | CHAR      | 'R'     | Recovery Request                  |
| Stream ID             | SHORT     | Numeric | Unique Stream Reference           |
| Start Sequence Number | INT       | Numeric | Requested Message Sequence Number |
| End Sequence Number   | INT       | Numeric | Requested Message Sequence Number |

## 7.2. Tick Data Recovery Response Message

This is the first message sent as response by Recovery Server on TCP to indicate whether Tick Data recovery request has been processed successfully by Recovery Server.

For this message, the sequence number field in Global Header will have the value 0 (zero).

| Field Name     | Data Type     | Value       | Brief Description                                               |
|----------------|---------------|-------------|-----------------------------------------------------------------|
| Global Header  | STREAM_HEADER | Header Data | Refer "Global Header" definition in <a href="#">Section 4</a> . |
| Message Type   | CHAR          | 'Y'         | Recovery Response                                               |
| Request Status | CHAR          | 'S' or 'E'  | 'S' – Success<br>'E' – Error                                    |

## 8. Recovery Guideline

The Tick Data feed is available on two separate Multicast Channels (Source 1 and Source 2) for each Stream on active-active basis. On one multicast channel the feed is delayed and lagging the other feed. Please refer to the circular for details regarding Source 1 and Source 2 multicast IP and port.

It is recommended that the end user application should subscribe to both multicast channels for each stream and receive the data from both the channels in active-active manner.

This needs to be done to ensure that data loss is minimized for the receiving applications as there is a possibility of data loss in multicast protocol.

If the end user application misses any tick data from both the active-active channels it can recover the ticks by sending recovery requests to recovery server on TCP.

The recovery request sent by client will be received by HA-Proxy load balancer at exchange side. The load balancer is used to distribute the recovery request to multiple recovery servers based on least number of connections algorithm. The load balancer will forward the recovery request to least connections recovery server. There are two HA-Proxy load balancers running at exchange side with single Virtual IP and Port. If one Load balancer goes down, then recovery requests will be automatically forwarded to the other load balancer.

1. Client can make 13 connections concurrently from same IP address to Load Balancer for each market segment.
2. Client can connect 100 times per second from same IP address to Load Balancer. There should be an interval of at least 10 milliseconds between successive recovery requests.
3. After successful client connection with Recovery Server, client has to send the recovery request within one second otherwise Recover Server will disconnect the client without sending any response.

## 9. Heartbeat Message

Heartbeat message will be sent when there is no data available for a few seconds. These messages will be available on all Streams.

In case of Heartbeat messages, the sequence number field in Global Header will have the value 0 (zero).

| Field Name        | Data Type     | Value       | Brief Description                                               |
|-------------------|---------------|-------------|-----------------------------------------------------------------|
| Global Header     | STREAM_HEADER | Header Data | Refer "Global Header" definition in <a href="#">Section 4</a> . |
| Message Type      | CHAR          | 'Z'         | Heartbeat message                                               |
| Last Sequence No. | INT           | Numeric     | Last sent data sequence no. of the Stream.                      |

## 10. FAQs

1) Old Price and Quantity is not provided as part of Order Modification and Cancellation. How to handle Order Modification and Cancellation?

All Order Messages are provided with Order Id data. Tracking of Orders needs to be done by Member Applications based on Order id. Whenever an Order Modification message is received the previous Order Image needs to be looked at based upon Order Id and accordingly adjusted with the Modified Order Message.

Same behavior for Order Cancellation Message.

2) Are active or aggressive Orders being sent as part of Order Messages?

Yes, active or aggressive orders are also being sent as part of Order Messages.

3) Is there any specific handling required for DQ functionality?

DQ functionality will be handled at Exchange End. For Member End Applications there is no specific handling required.

4) The multicast feed specifications are applicable for which market segments?

The specifications are applicable for NSE CM & CD market segments.

5) Is Order Id same as interactive Order Number?

Yes, Order id is same as interactive Order Number.

6) Trade Message has an Order Id which is not present in client Order Book. Is this scenario possible?

Yes, this scenario is possible as market orders are not being sent. In such scenario the particular Order Id should be ignored by the client application.

7) Order Cancel message has a price or quantity which is different from the original order. Is this possible?

Yes, this scenario is possible. For Order Cancel messages the client application should consider only the Order Id field and accordingly remove the original order from the order book.

8) Is there a limit to the maximum number of messages which can be recovered in a single session from the Exchange Recovery Servers?

Yes. This is currently 300000 messages. More messages can be recovered through subsequent requests.

9) Is there any handling required for pre-open orders in CM segment?

No specific handling is required for pre-open orders at the Member end. Pre-open orders will not be sent out on the MTBT Feed in the Order Collection phase of Pre-open Session. The Trades occurring in the Matching Phase of the Pre-open Session will be sent out on the feed. This shall be applicable for securities/contracts eligible for regular pre-open session, for IPO / Relisted / Investment Companies (ICs) / Investment Holding Companies (IHCs) securities eligible for special pre-open (SPOS) session and illiquid securities eligible for periodic call auction session. The Pending Orders which will be carried forward to the Normal Market Session will be sent out as normal orders after the Pre-open Session ends. This shall be applicable for securities/contracts eligible for regular pre-open session and for IPO / Relisted / Investment Companies (ICs) / Investment Holding Companies (IHCs) securities eligible for special pre-open (SPOS) session and shall not be applicable for illiquid securities eligible for periodic call auction session.

10) Is there any handling required for Closing Auction Session (CAS) orders in CM segment?

No specific handling is required for CAS orders at the Member end. CAS orders will not be sent out on the MTBT Feed in the Order Collection phase of closing auction session. The Trades occurring in the Matching Phase of the closing auction session will be sent out on the feed. The cancellation of pending orders at the end of closing auction session will be sent out on the feed.

11) What is the use of Last Sequence No. field in the Heartbeat packet?

Last Sequence No. field in the heartbeat message can be used to derive the sequence number of subsequent messages.

12) Is Matched or Crossed Orders Scenario possible?

Subscribers of MTBT feed can construct the order book based on the order and trade messages which are sent. As part of the feed, new orders including the active orders are sent. As active orders can result in trade, there is a possibility of matched or crossed orders being in the order book which is constructed by the subscribers (end client applications). However, the end client applications can detect this condition of matched or crossed orders (i.e., the order has resulted in trade) by doing a simple check or validation. Based on every message received, the end client application needs to update the order book first. After updating the order book, the best buy price and best sell price will be available in the order book. If the best buy price is greater than or equal to the best sell price, then there are matched or crossed orders in the book i.e., Trades are taking place. By carrying out this check (best buy  $\geq$  best sell), the scenario of matched or crossed orders can be detected.

## 11. Tuning guidelines

### 11.1 NIC Recommendations

The minimum value of the Max Receive Buffer size on the NICs which are going to be used for receiving the TBT Multicast should be 4 KB. NICs with the specified value below the recommended value may not be able to handle the incoming data bursts, resulting in UDP packet drops. In case of teamed NICs (NIC Bonds), this is applicable for both the underlying physical NICs.

**Where:** This is meant for the machine which runs Member applications which subscribes to the TBT Multicast.

### 11.2 Increase the Kernel Receiver Backlog

To find out the current value, as root, execute the following command: `sysctl -a | grep netdev_max_backlog`

```
/tbtdev1/users/tbtdev> sysctl -a | grep netdev_max_backlog
net.core.netdev_max_backlog = 1000
```

Make a note of the value of this parameter.

If it is lower than 50000, as root, execute the following command to increase it as follows:

`/sbin/sysctl -w sys.net.core.netdev_max_backlog=50000` Verify whether the parameter has been set as desired:

```
/tbtdev1/users/tbtdev> sysctl -a | grep netdev_max_backlog
net.core.netdev_max_backlog = 50000
```

**Where:** This should be done on the machine which runs Member application which subscribes to the TBT Multicast.

### 11.3 Increase the NIC Ring Buffer Receive size on NICs:

As root, execute the following command for all the NICs on the system which are used for receiving TBT Multicast data:

`ethtool -g ethX`

.. Where X corresponds to the NIC number (run the "ifconfig" command to list NICs on your system).

```
[idxmgr@indexdev1 ~]$ ethtool -g eth0
Ring parameters for eth0:
Pre-set maximums:
RX:                4078
RX Mini:           0
RX Jumbo:           0
TX:                511
Current hardware settings:
RX:                200
RX Mini:           0
RX Jumbo:           0
TX:                511
```

Make a note of the following values:

- a) "RX" parameter displayed in the "Pre-set maximums" (maximum receive buffer size which can be set).
- b) "RX" parameter displayed in the "Current hardware settings" (current receive buffer size).

If "b" is lower than "a", as root, execute the following command to increase such that it is set to the max:

```
ethtool -G ethX rx a
```

.. Where X corresponds to the NIC number and 'a' corresponds to maximum value that can be set for the RX parameter.

In case of teamed NICs (NIC Bonds), this tuning should be performed for the underlying physical NICs.

Verify whether the parameter has been set as desired:

```
[idxmgr@indexdev1 ~]$ ethtool -g eth0
Ring parameters for eth0:
Pre-set maximums:
RX:                4078
RX Mini:           0
RX Jumbo:           0
TX:                511
Current hardware settings:
RX:                4078
RX Mini:           0
RX Jumbo:           0
TX:                511
```

**Where:** This should be done on the machine which runs the Member application which subscribes to the TBT Multicast.

## 11.4 Increase the OS Send and Receive Buffers

As root, execute the following commands:

```
/tbtdv1/users/tbtdv> sysctl -a | grep rmem_max
net.core.rmem_max = 4669986
```

```
sysctl -a | grep rmem_max sysctl -a |s sysctl -a | grep tcp_mem
```

```
/tbtdv1/users/tbtdv> sysctl -a | grep tcp_mem
net.ipv4.tcp_mem = 196608 262144 4669986
```

Make a note of the value of these parameters.

If the parameter `rmem_max` and third parameter of `tcp_mem` are lower than 134217728, as root, execute the following command to increase them to 134217728 accordingly:

```
/sbin/sysctl -w net.core.rmem_max=134217728
```

```
/sbin/sysctl -w net.ipv4.tcp_mem=10240 87380 134217728
```

```
/tbtdv1/users/tbtdv> sysctl -a | grep rmem_max
net.core.rmem_max = 134217728
```

```
/tbtdv1/users/tbtdv> sysctl -a | grep tcp_mem
net.ipv4.tcp_mem = 196608 262144 134217728
```

Verify whether the parameter has been set as desired:

(The first two values of `tcp_mem` shown above may differ with Member's machine.)

### System-specific consideration:

The network read buffer of OS is being set to a significantly high value here (134 MB). This will become applicable system-wide, which means that all applications running on the system will be able to request this amount of OS network read buffer size from OS. Tune as per your available RAM.

**Where:** This should be done on the machine which runs the Member application which subscribes to the TBT Multicast.

## 11.5 Increase the Application Send and Receive Buffers

Ensure that large network Receive Buffer is requested from the OS through the Member application code on all the sockets used to receive UDP traffic.

```
int nTCPRecvBufSize = 134217728;
if(0 != setsockopt(nFD, SOL_SOCKET, SO_RCVBUF,
&nTCPRecvBufSize, sizeof(nTCPRecvBufSize))
{
    // This means that the call did not go through.
    // Log this error and take necessary action. }
```

**Where:** This must be done in the Member application just after creating the socket(s) used to receive the TBT Multicast.

## 11.6 Ensure that Multicast IP is also provided to “bind”

In Member software, when populating the “sockaddr\_in” structure which is passed to “bind” system call, ensure that the Multicast IP Address is populated as well when populating the port. On systems which subscribe to multicast from both markets on same machine, this will result in multicast from both the markets to be received on the same socket, resulting in data issues.

```
int nRetVal = 0;
struct sockaddr_in stLocalAddr;
memset(&stLocalAddr, 0, sizeof(stLocalAddr));

stLocalAddr.sin_family = AF_INET;
stLocalAddr.sin_port = htons(pstStreamAttr->nMulticastPort);
stLocalAddr.sin_addr.s_addr = inet_addr(pstStreamAttr->szMulticastIP);

nRetVal = bind(pstStreamAttr->nRecvSockFD, (struct sockaddr *)&stLocalAddr,
sizeof(stLocalAddr));
if(nRetVal != 0)
{
    nRetVal = errno;
    LOG_FATAL("Error in creating client socket <%s>", strerror(nRetVal));
    return FAILURE;
}
```

**Where:** This must be done in Member application when it binds to the Multicast Port before adding the Membership Request for receiving the TBT Multicast.

## 11.7 Disclaimer

The methods provided in the Tuning Guidelines are in an effort to try and help Members tune their systems. Members must take into careful consideration the load on their systems, availability of system resources and their specific use-cases before embarking on any system tuning exercise. The Exchange does not officially mandate the use of any of the tuning methods mentioned here and is not responsible for the results of any tuning exercise carried out by the Member at their end. Currently these guidelines are available for Linux systems only.

## 12. Abbreviations and Acronyms Used

|          |                                         |
|----------|-----------------------------------------|
| EOD      | Information Sent at End of Day          |
| CM       | Cash Market                             |
| F&O/FAO  | Future & Options Market                 |
| CD       | Currency Derivatives Market             |
| COM      | Community Derivatives Market            |
| AGM      | Annual General Meeting                  |
| AON      | All Or None                             |
| EGM      | Extraordinary General Meeting           |
| MF       | Minimum Fill                            |
| NEAT     | National Exchange for Automated Trading |
| NNF      | Non-Neat Front End                      |
| NSE      | National Stock Exchange                 |
| VV.RR.SS | Version. Release. Sub-release           |
| CAS      | Closing Auction Session                 |
| SPOS     | Special Pre-open Session                |
| IC       | Investment Companies                    |
| IHC      | Investment Holding Companies            |

## 13. Support Information

| Name                         | Email                | Contact Number |
|------------------------------|----------------------|----------------|
| Business & Technical Support | marketdata@nse.co.in | 91-22-26598385 |